

Caja Nap de Fiber Optic Terminal Box - 16 Fibers

Description

Fiber Optic Terminal Box provides fiber optic cable management for the connection of distribution cables and drop cables at the user access point in fiber optic network. Linkwell provides Fiber Optic Terminal Box made of high quality ABS plastic. Fiber Optic Terminal Box integrates fiber cable fixation, storage, splicing and distribution in an outdoor and indoor wall mounting and outdoor pole mounting box.







Features


- Water-proof design with IP65 Protection level
- Integrated with splice tray and cable management system
- Fiber bending radius control more than 40mm
- Suitable for the fusion splice or mechanical splice
- 1×8 or 1×16 blockless spitter can be installed as an option

Specification

Max. Capacity	SC: 18 fibers		
	LC: 36 fibers		
Max. Inlet Cable Diameter	2pcs for Φ6~ 11mm cable, 1 oval for Φ6~ 18mm		
Inlet Cable Number	2 cable glands and 1 uncut cable port		
Max. Outlet Cable Diameter	2x3mm		
Outlet Cable Number	16 pcs		
Protection Grade	IP65		
Installation Method	Wall mounting and pole mounting (pole ring are optional)		
Working Environment	Outdoor and indoor		
Dimension	306.4(H)*182.5(W)*115.5(D)mm		
Working Temperature	-20°C~+60°C		
Storage Temperature	-40°C~+70°C		
Relative Humidity	0%~95%		
Air Pressure	70~106KPa		



OB-ODB-16T	1 49		
None: without ac	lapter		
SC: SC/UPC			
SA: SC/APC			
LC: LC/UPC			
LA: LC/APC			
None: without pi	gtail		
SC: SC/UPC	SC: SC/UPC		
SA: SC/APC	SA: SC/APC		
LC: LC/UPC	LC: LC/UPC		
LA: LC/APC			
None: without sp	olitter		
B12: 1×2			
B14: 1×4	B14: 1×4		
B18: 1×8	B18: 1×8		
B116: 1×16	B116: 1×16		
W: wall mounting			
P: pole mounting			
10 Piezas	Peso bruto	15.2kg	
62*33*37cm	Peso neto	14.2kg	
	None: without act SC: SC/UPC SA: SC/APC LC: LC/UPC LA: LC/APC None: without pi SC: SC/UPC SA: SC/APC LC: LC/UPC LA: LC/APC None: without sp B12: 1×2 B14: 1×4 B18: 1×8 B116: 1×16 W: wall mounting P: pole mounting	None: without adapter SC: SC/UPC SA: SC/APC LC: LC/UPC LA: LC/APC None: without pigtail SC: SC/UPC SA: SC/APC LC: LC/UPC LA: LC/APC None: without splitter B12: 1×2 B14: 1×4 B18: 1×8 B116: 1×16 W: wall mounting P: pole mounting Peso bruto	

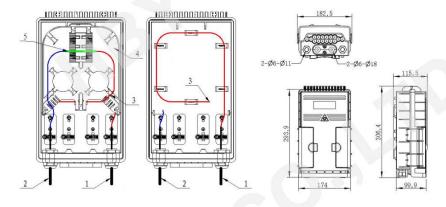

- 1 Cable entry port
- 2 Cable output port
- 3 Fiber optic cable
- 4 Fiber optic splice tray
- 5 Heat protection shrinkable sleeve

- www.hbyweb.ru
- www.hbyweb.com
- E-mail:sales@hbyweb.com